



**LOADALL** | AGRICULTURAL RANGE

532-60/538-60/532-70/538-70/542-70/536-95/542-100/560-80

Power rating: 109hp – 173hp   Lift capacity: 3,200kg – 6,000kg   Lift height: 6.2m – 9.8m





# THE WORLD'S NO.1 AGRICULTURAL TELESCOPIC HANDLER

Our Stage V Series III Loadalls are the telescopic handler of choice for agriculture. Choose between the 109hp (81kW) AGRI, the 130hp (97kW) AGRISUPER, the 150hp (112kW) AGRIXTRA or the high performance 173hp (129kW) AGRIPRO. All feature our best cab ever, while the SUPER, XTRA and PRO models are available with our DualTech Variable Transmission.

## OUR BEST CAB EVER

Our all-new CommandPlus cab provides operators with the best-in-class cab space, noise level and all-round visibility, plus our command driving position.

## OUR BEST TRANSMISSIONS

Our range of transmission options are tailored to your specific agricultural requirements, ranging from TorqueLock, PowerShift, AutoShift and the award winning DualTech Variable Transmission.

## OUR BEST ENGINES

Our 4.8-litre DieselMAX engines meet the latest EU Stage V regulations with ultra-low emissions, auto-stop technology, low fuel consumption and next generation particulate control.

## OUR BEST HYDRAULICS

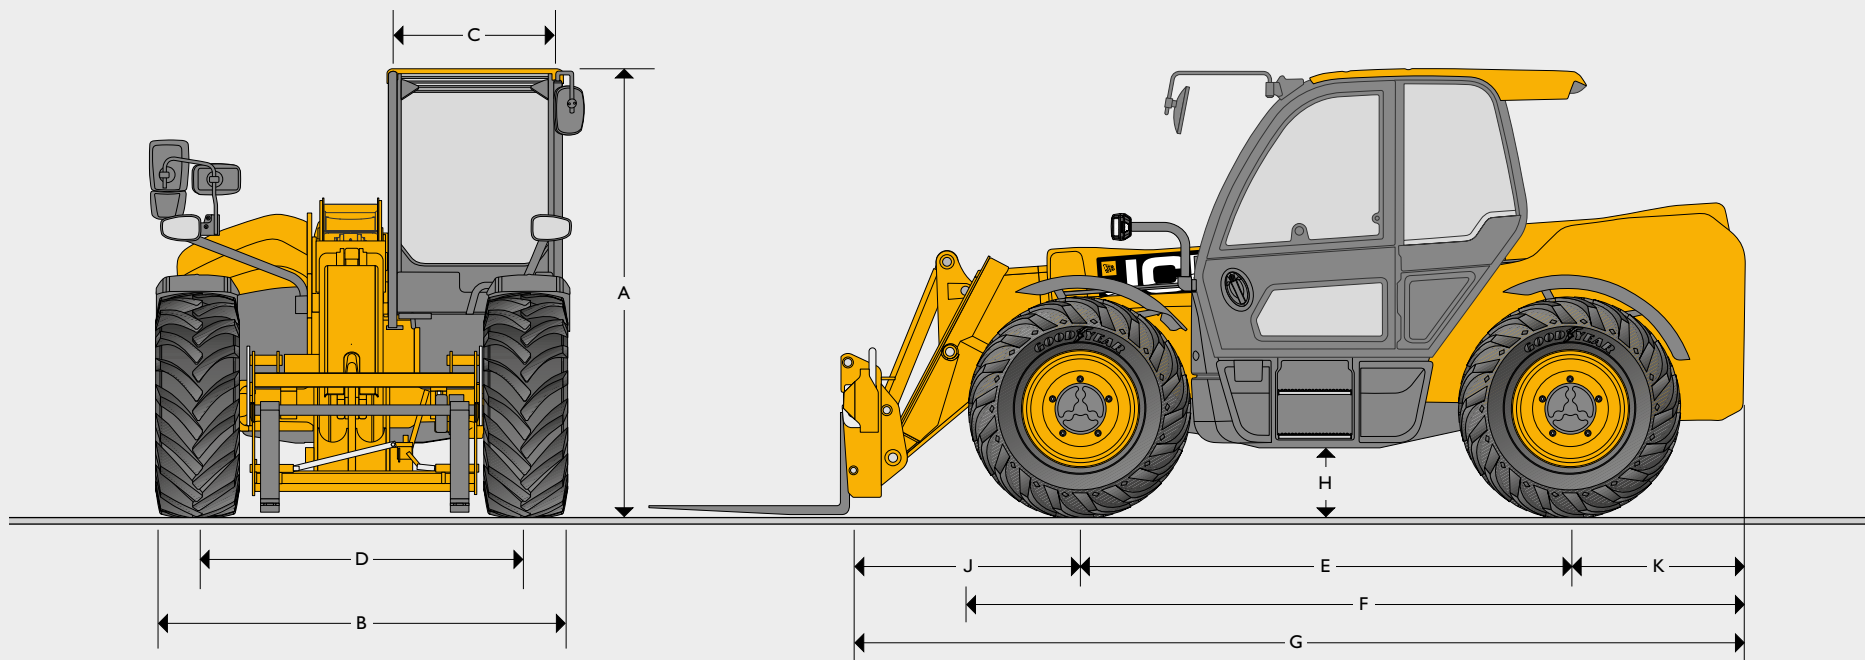
Our regenerative hydraulics system, auto bucket rattle, auxiliary venting, boom end damping and auto SmoothRide System all form part of the JCB Smart Hydraulics package.

## OUR BEST SAFETY FEATURES

Our patented Adaptive Load Control System allows the operator to drive seamlessly without hindering productivity and ensuring stability.



## STATIC DIMENSIONS



## STATIC DIMENSIONS

| Machine model                                          |         | 532-60    |           | 538-60    | 538-60 PRO | 532-70    | 538-70    | 542-70    | 542-70 PRO | 536-95    | 542-100   | 560-80    |           |
|--------------------------------------------------------|---------|-----------|-----------|-----------|------------|-----------|-----------|-----------|------------|-----------|-----------|-----------|-----------|
| A Overall height                                       | m       | 2.44      | 2.51      | 2.51      | 2.54       | 2.51      | 2.51      | 2.51      | 2.54       | 2.51      | 2.54      | 2.63      | 2.69      |
| B Overall width (over tyres)*                          | m       | 2.23      | 2.34      | 2.34      | 2.47       | 2.34      | 2.34      | 2.34      | 2.47       | 2.34      | 2.47      | 2.55      | 2.48      |
| C Inside width of cab                                  | m       | 0.97      | 0.97      | 0.97      | 0.97       | 0.97      | 0.97      | 0.97      | 0.97       | 0.97      | 0.97      | 0.97      | 0.97      |
| D Front track                                          | m       | 1.84      | 1.84      | 1.84      | 1.90       | 1.84      | 1.84      | 1.84      | 1.90       | 1.84      | 1.90      | 1.92      | 1.92      |
| E Wheelbase                                            | m       | 2.75      | 2.75      | 2.75      | 2.72       | 2.75      | 2.75      | 2.75      | 2.72       | 2.75      | 2.72      | 2.75      | 2.75      |
| F Overall length to front tyres                        | m       | 3.95      | 4.03      | 4.03      | 4.05       | 4.38      | 4.38      | 4.38      | 4.40       | 4.40      | 4.42      | 4.49      | 4.55      |
| G Overall length to front carriage                     | m       | 4.64      | 4.64      | 4.64      | 4.64       | 5.07      | 5.07      | 5.07      | 5.07       | 5.02      | 5.02      | 5.42      | 5.42      |
| H Ground clearance                                     | m       | 0.30      | 0.37      | 0.37      | 0.40       | 0.37      | 0.37      | 0.37      | 0.40       | 0.37      | 0.40      | 0.37      | 0.43      |
| J Front wheel centre to carriage                       | m       | 1.24      | 1.24      | 1.24      | 1.24       | 1.32      | 1.32      | 1.32      | 1.32       | 1.24      | 1.24      | 1.57      | 1.57      |
| K Rear wheel centre to rear face                       | m       | 0.65      | 0.65      | 0.65      | 0.69       | 1.00      | 1.00      | 1.00      | 1.04       | 1.03      | 1.07      | 1.01      | 1.01      |
| Turn radius - over tyres                               | m       | 3.7       | 3.7       | 3.7       | 4.4        | 3.7       | 3.7       | 3.7       | 4.4        | 3.7       | 4.4       | 4.1       | 4.1       |
| Carriage rollback angle - for shovel in carry position | degrees | 42.6      | 42.6      | 42.6      | 42.6       | 42.6      | 42.6      | 42.6      | 42.6       | 41        | 43        | 43        | 43        |
| Carriage dump angle - for shovel at full height        | degrees | 42.5      | 42.5      | 42.5      | 42.5       | 37.5      | 37.5      | 37.5      | 37.5       | 24        | 37        | 43.5      | 43.5      |
| Weight (Powershift)                                    | kg      | 7340      | 7520      | 7560      | N/A        | 7600      | 8300      | 8300      | N/A        | 8760      | N/A       | 11360     | 11610     |
| Weight (DualTech VT)                                   | kg      | 7740      | 7920      | 7960      | 8280       | 8370      | 8520      | 8520      | 8840       | 8820      | 9160      | 11540     | 11790     |
| Tyres                                                  |         | 380/75R20 | 460/70R24 | 460/70R24 | 500/70R24  | 460/70R24 | 460/70R24 | 460/70R24 | 500/70R24  | 460/70R24 | 500/70R24 | 500/70R24 | 480/80R26 |

Machine shown with roof mounted air conditioning fitted.

\*Dependant upon tyre specified.

| OPTIONS                                                                                                   |      |            |           |                  |
|-----------------------------------------------------------------------------------------------------------|------|------------|-----------|------------------|
|                                                                                                           | AGRI | AGRI SUPER | AGRI XTRA | AGRI PRO         |
| <b>Drivetrain</b>                                                                                         |      |            |           |                  |
| 109hp / 81kW                                                                                              | ●    | –          | –         | –                |
| 130hp / 97kW                                                                                              | –    | ●          | –         | –                |
| 150hp / 112kW                                                                                             | –    | –          | ●         | –                |
| 173hp / 129kW                                                                                             | –    | –          | –         | ●                |
| Auto reversing fan                                                                                        | ●    | ●          | ●         | ●                |
| 40kph Powershift (4-speed), (incorporating TorqueLock in 4th gear)                                        | ●    | –          | –         | –                |
| 40kph Powershift (4-speed), (33/37kph for 560-80 (tyre dependant))                                        | –    | ○          | –         | –                |
| 40kph Autoshift (6-speed), (incorporating TorqueLock in 5th and 6th gear)                                 | –    | ○          | ○         | –                |
| 40kph DualTech Variable Transmission, (combined Hydrostatic and Mechanical Drive with Flexi Mode)         | –    | ○          | ○         | –                |
| 50kph DualTech Variable Transmission, (combined Hydrostatic and Mechanical Drive with Flexi Mode)         | –    | –          | –         | ● (Excl. 560-80) |
| Electrical 2/4WD disconnect                                                                               | ●    | ●          | ●         | ●                |
| Limited Slip Differential (LSD) in front axle                                                             | ○    | ○          | ●         | ●                |
| <b>Smart Hydraulics</b>                                                                                   |      |            |           |                  |
| Regenerative hydraulics for lower and retract (536-95 lower only)                                         | ●    | ●          | ●         | ●                |
| End damping for lift and retract (536-95 lift only)                                                       | ●    | ●          | ●         | ●                |
| Quick auxiliary venting – internal and external                                                           | ●    | ●          | ●         | ●                |
| Auto - Bucket rattle system                                                                               | ●    | ●          | ●         | ●                |
| Auto – Smooth Ride System                                                                                 | ●    | ●          | ●         | ●                |
| High flow - Double acting – auxiliary system                                                              | ○    | ○          | ○         | ○                |
| Double acting – Single line - Front auxiliary                                                             | ●    | ●          | ●         | ●                |
| Double acting – Single line - Rear auxiliary                                                              | ●    | ●          | ●         | ●                |
| Double acting – Twin line - Front auxiliaries                                                             | ○    | ○          | ○         | ○                |
| Double acting – Twin line - Rear auxiliaries (not available on 6m models)                                 | ○    | ○          | ○         | ○                |
| Electro-Hydraulic pin locking                                                                             | ○    | ○          | ○         | ○                |
| Sway: Electro-Hydraulically controlled front axle to chassis levelling system (542-70 & 536-95 (6 Speed)) | –    | ○          | ○         | –                |
| <b>Cab</b>                                                                                                |      |            |           |                  |
| Seat mounted control pod                                                                                  | ●    | ●          | ●         | ●                |
| Mechanical suspension seat                                                                                | ○    | –          | –         | –                |
| Air suspension seat                                                                                       | ○    | ○          | ○         | –                |
| Heated air suspension seat                                                                                | ○    | ○          | ○         | –                |
| Half leather, heated and vented air suspension seat                                                       | –    | ○          | ○         | ●                |
| Air conditioning                                                                                          | ○    | ○          | ●         | ●                |
| Auto temperature climate control, air conditioning                                                        | ○    | ○          | ○         | ○                |
| Heated screen – rear                                                                                      | ●    | ●          | ●         | ●                |
| Heated screen – front                                                                                     | ○    | ○          | ○         | ○                |
| External screen guard – front and roof                                                                    | ○    | ○          | ○         | ○                |
| <b>Lighting</b>                                                                                           |      |            |           |                  |
| Halogen worklights – 2x front cab, 2x rear cab, 2x boom, 1x hitch light & interior light                  | ●    | ●          | –         | –                |
| LED worklights – 2x front cab, 2x rear cab, 2x boom, 1x hitch light & interior light                      | ○    | ○          | ●         | ●                |
| 360° LED worklight package – additional 2x front cab & 2x rear chassis                                    | –    | ○          | ●         | ●                |
| LED road light package – front and rear road lights number plate light                                    | ○    | ○          | ○         | ○                |
| <b>Braking</b>                                                                                            |      |            |           |                  |
| Twin line hydraulic trailer brakes* with 7 pin electrics & E.B.S socket                                   | ●    | ●          | ●         | ●                |
| Twin line air trailer brakes* with 7 pin electrics & A.B.S socket                                         | –    | ○          | ○         | ○                |
| Twin line air trailer brakes* & single line hydraulic with 7 pin electrics & A.B.S socket                 | –    | ○          | ○         | ○                |
| <b>Other</b>                                                                                              |      |            |           |                  |
| Mechanical tow hitch*                                                                                     | ●    | ●          | ●         | ●                |
| Hydraulic pick up tow hitch*                                                                              | ○    | ○          | ○         | ○                |
| Ladder mounted tow hitch*                                                                                 | ○    | ○          | ○         | ○                |
| Boom ingress protection kit (7 & 8m only)                                                                 | ○    | ○          | ●         | ●                |
| Remote centralised rear grease points (7 & 8m only)                                                       | ○    | ○          | ●         | ●                |
| Transmission belly guard kit (std with DTVT)                                                              | ○    | ○          | ○         | ●                |

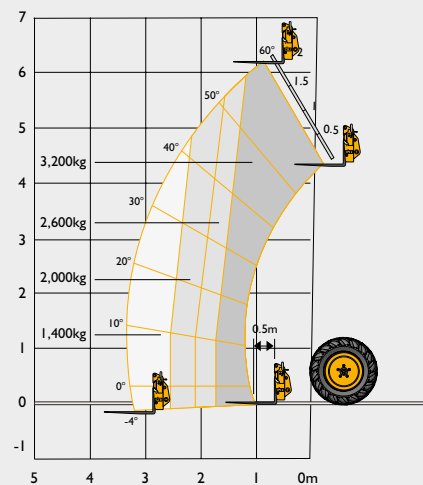
Standard ● Optional ○ Not applicable –

\*Complies as a European type approved tractor. (Some options are territory dependant).


## LIFT PERFORMANCE

Machine model (Powershift)


532-60



532-70

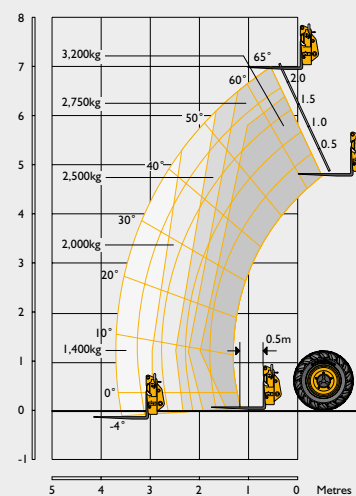





536-95

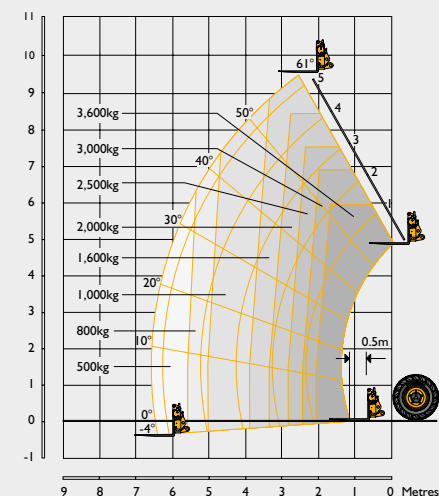

|                                      |     |      |      |      |
|--------------------------------------|-----|------|------|------|
| Lift capacity - maximum              | kg  | 3200 | 3200 | 3600 |
| Lift capacity to full height         | kg  | 3200 | 2750 | 1600 |
| Lift capacity at full reach          | kg  | 1400 | 1400 | 500  |
| Lift height                          | m   | 6.22 | 7    | 9.49 |
| Forward reach at maximum lift height | m   | 0.87 | 0.48 | 2.43 |
| Maximum forward reach                | m   | 3.33 | 3.72 | 6.55 |
| Reach with 1 tonne load              | m   | 3.33 | 3.72 | 4.98 |
| Placing height                       | m   | 5.42 | 6.3  | 8.78 |
| Tear out force                       | daN | 4750 | 3980 | 4470 |






Complies with stability test: ISO 22915-14:2010.

## LIFT PERFORMANCE
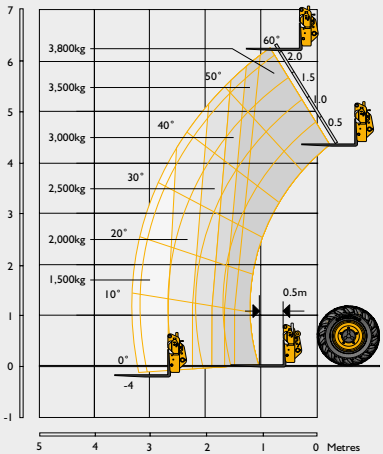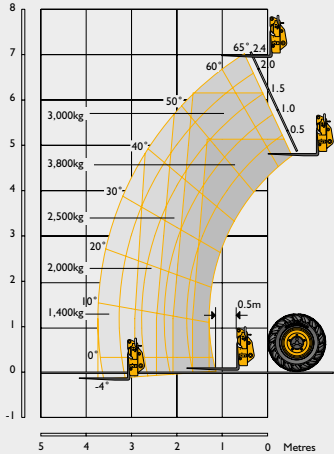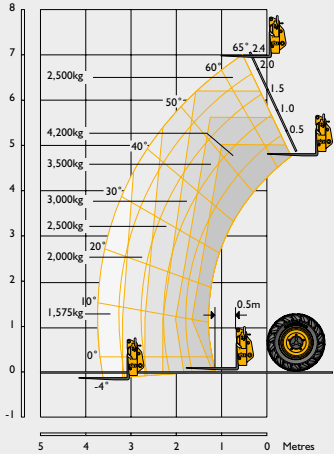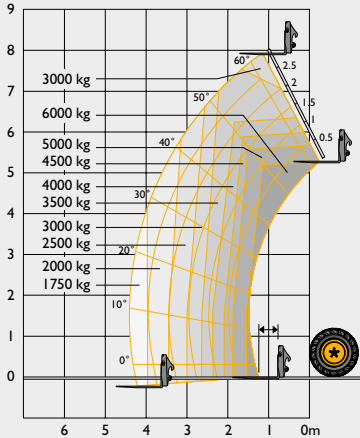
| Machine model (Powershift)           |     | 538-60                                                                            | 538-70                                                                             | 542-70                                                                              | 560-80                                                                              |
|--------------------------------------|-----|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                      |     |  |  |  |  |
| Lift capacity - maximum              | kg  | 3800                                                                              | 3800                                                                               | 4200                                                                                | 6000                                                                                |
| Lift capacity to full height         | kg  | 3800                                                                              | 2500                                                                               | 2500                                                                                | 3000                                                                                |
| Lift capacity at full reach          | kg  | 1500                                                                              | 1400                                                                               | 1575                                                                                | 1750                                                                                |
| Lift height                          | m   | 6.23                                                                              | 7.01                                                                               | 7.01                                                                                | 7.9                                                                                 |
| Forward reach at maximum lift height | m   | 0.87                                                                              | 0.48                                                                               | 0.48                                                                                | 0.92                                                                                |
| Maximum forward reach                | m   | 3.34                                                                              | 3.73                                                                               | 3.76                                                                                | 4.48                                                                                |
| Reach with 1 tonne load              | m   | 3.34                                                                              | 3.73                                                                               | 3.76                                                                                | 4.48                                                                                |
| Placing height                       | m   | 5.42                                                                              | 6.3                                                                                | 6.3                                                                                 | 6.64                                                                                |
| Tear out force                       | daN | 4570                                                                              | 4400                                                                               | 4400                                                                                | 6650                                                                                |






Complies with stability test: ISO 22915-14:2010.

## LIFT PERFORMANCE
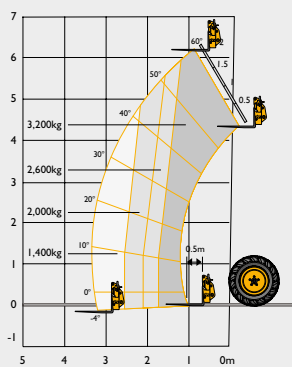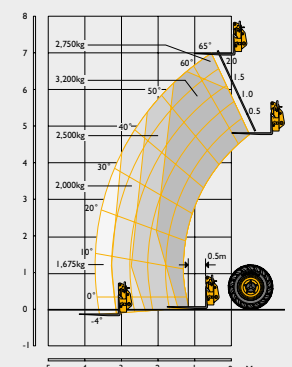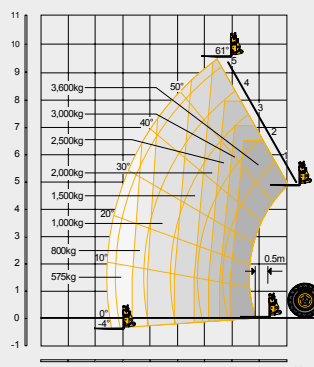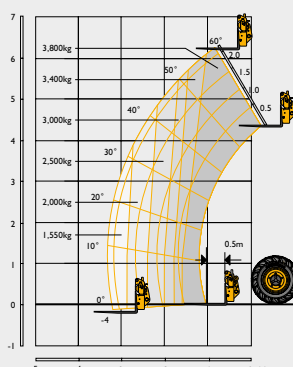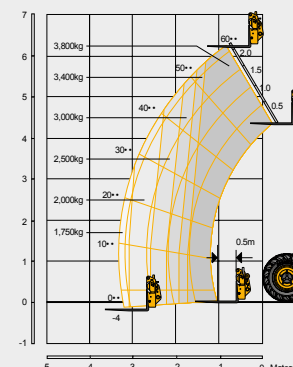
| Machine model (DualTech VT)          |     | 532-60                                                                            | 532-70                                                                             | 536-95                                                                              | 538-60                                                                              | 538-60 PRO                                                                          |
|--------------------------------------|-----|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                      |     |  |  |  |  |  |
| Lift capacity - maximum              | kg  | 3200                                                                              | 3200                                                                               | 3600                                                                                | 3800                                                                                | 3800                                                                                |
| Lift capacity to full height         | kg  | 3200                                                                              | 2750                                                                               | 2000                                                                                | 3800                                                                                | 3800                                                                                |
| Lift capacity at full reach          | kg  | 1400                                                                              | 1675                                                                               | 575                                                                                 | 1550                                                                                | 1750                                                                                |
| Lift height                          | m   | 6.22                                                                              | 7                                                                                  | 9.49                                                                                | 6.23                                                                                | 6.23                                                                                |
| Forward reach at maximum lift height | m   | 0.87                                                                              | 0.48                                                                               | 2.43                                                                                | 0.87                                                                                | 0.87                                                                                |
| Maximum forward reach                | m   | 3.33                                                                              | 3.72                                                                               | 6.55                                                                                | 3.34                                                                                | 3.33                                                                                |
| Reach with 1 tonne load              | m   | 3.33                                                                              | 3.72                                                                               | 5.09                                                                                | 3.34                                                                                | 3.33                                                                                |
| Placing height                       | m   | 5.42                                                                              | 6.3                                                                                | 8.78                                                                                | 5.42                                                                                | 6.23                                                                                |
| Tear out force                       | daN | 4570                                                                              | 3980                                                                               | 4470                                                                                | 4570                                                                                | 4400                                                                                |

Complies with stability test: ISO 22915-14:2010.

## LIFT PERFORMANCE
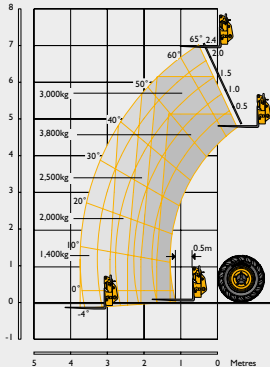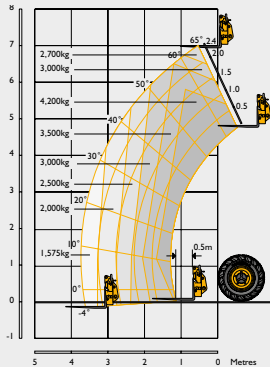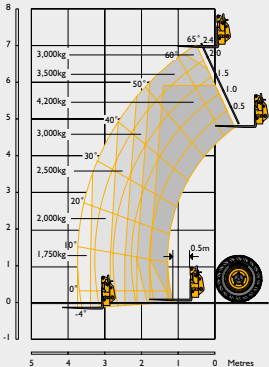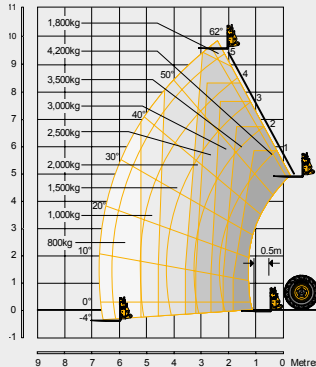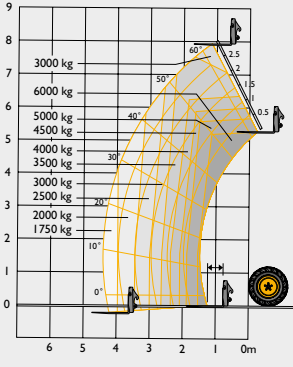
| Machine model (DualTech VT)          |     | 538-70                                                                            | 542-70                                                                             | 542-70 PRO                                                                          | 542-100                                                                             | 560-80                                                                              |
|--------------------------------------|-----|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                      |     |  |  |  |  |  |
| Lift capacity - maximum              | kg  | 3800                                                                              | 4200                                                                               | 4200                                                                                | 4200                                                                                | 6000                                                                                |
| Lift capacity to full height         | kg  | 2500                                                                              | 2750                                                                               | 3000                                                                                | 1800                                                                                | 3000                                                                                |
| Lift capacity at full reach          | kg  | 1400                                                                              | 1675                                                                               | 1750                                                                                | 600                                                                                 | 1750                                                                                |
| Lift height                          | m   | 7.01                                                                              | 7.01                                                                               | 7.04                                                                                | 9.81                                                                                | 7.9                                                                                 |
| Forward reach at maximum lift height | m   | 0.48                                                                              | 0.48                                                                               | 0.48                                                                                | 2.36                                                                                | 0.92                                                                                |
| Maximum forward reach                | m   | 3.73                                                                              | 3.73                                                                               | 3.71                                                                                | 6.72                                                                                | 4.48                                                                                |
| Reach with 1 tonne load              | m   | 3.73                                                                              | 3.73                                                                               | 3.71                                                                                | 5.15                                                                                | 4.48                                                                                |
| Placing height                       | m   | 6.3                                                                               | 6.3                                                                                | 6.3                                                                                 | 9.81                                                                                | 6.64                                                                                |
| Tear out force                       | daN | 4400                                                                              | 4400                                                                               | 4400                                                                                | 4825                                                                                | 6650                                                                                |

Complies with stability test: ISO 22915-14:2010.

| ENGINE           |         |                     |            |           |           |
|------------------|---------|---------------------|------------|-----------|-----------|
| Model            |         | AGRI                | AGRI SUPER | AGRI XTRA | AGRI PRO  |
| Manufacturer     |         | JCB                 |            |           |           |
| Model            |         | DieselMAX           |            |           |           |
| Emissions level  |         | Euro Stage V        |            |           |           |
| After treatment  |         | DOC, SCR, DPF       |            |           |           |
| Aspiration       |         | Turbocharged cooled |            |           |           |
| Power rating     |         |                     |            |           |           |
| Power @ 2200rpm  | hp (kW) | 109 (81)            | 130 (97)   | 150 (112) | 173 (129) |
| Torque rating    |         |                     |            |           |           |
| Torque @ 1500rpm | Nm      | 516                 | 550        | 600       | 690       |
| Specification    |         |                     |            |           |           |
| Displacement     | ltr     | 4.8                 |            |           |           |
| No. of cylinders |         | 4                   |            |           |           |
| Bore size        | mm      | 106                 |            |           |           |
| Stroke           | mm      | 135                 |            |           |           |

| HYDRAULICS                |         |                       |        |            |        |        |        |            |        |         |                |               |
|---------------------------|---------|-----------------------|--------|------------|--------|--------|--------|------------|--------|---------|----------------|---------------|
| Model                     |         | 532-60                | 538-60 | 538-60 PRO | 532-70 | 538-70 | 542-70 | 542-70 PRO | 536-95 | 542-100 | 560-80 p/shift | 560-80 d/tecl |
| Operating system pressure | bar     | 240                   | 260    | 260        | 250    | 260    | 260    | 260        | 240    | 260     | 260            | 260           |
| Main hydraulics           | l/min   | 140                   | 140    | 160        | 140    | 140    | 140    | 160        | 140    | 160     | 140            | 160           |
| Pump type                 |         | Variable Displacement |        |            |        |        |        |            |        |         |                |               |
| Hydraulic cycle times     |         |                       |        |            |        |        |        |            |        |         |                |               |
| Lift                      | seconds | 4.2                   | 6.1    | 6.1        | 4.5    | 5.2    | 5.2    | 5.2        | 6      | 6       | 7.4            | 7.4           |
| Lower                     | seconds | 4.7                   | 6.8    | 6.8        | 6.6    | 5.7    | 5.7    | 5.7        | 6.9    | 6.9     | 7.9            | 7.9           |
| Extend                    | seconds | 6.1                   | 6      | 6          | 6.7    | 6.6    | 6.6    | 6.6        | 9.1    | 9.1     | 8.1            | 8.1           |
| Retract                   | seconds | 4.4                   | 4.6    | 4.6        | 5      | 5      | 5      | 5          | 11.3   | 11.3    | 7.1            | 7.1           |
| Bucket dump               | seconds | 2.3                   | 2.7    | 2.7        | 2.7    | 2.8    | 2.8    | 2.8        | 1.9    | 1.9     | 2.6            | 2.6           |
| Bucket crowd              | seconds | 2.1                   | 2.1    | 2.1        | 2.3    | 2.2    | 2.2    | 2.2        | 2.3    | 2.3     | 2.8            | 2.8           |

\*Cycle times may vary on machine specification.

| SERVICE CAPACITIES |        |      |
|--------------------|--------|------|
| Fuel tank          | litres | 169  |
| DEF tank           | litres | 20.8 |
| Screenwash tank    | litres | 6.2  |
| Hydraulic tank     | litres | 113  |
| Coolant            | litres | 28   |
| Engine oil sump    | litres | 15   |

| ELECTRICAL SYSTEM |          |     |
|-------------------|----------|-----|
| System voltage    | Volt     | 12  |
| Alternator        | Amp/hour | 150 |
| Battery capacity  | Amp/hour | 180 |

| NOISE AND VIBRATION                                                   |                  |       |             |                                                                                                                                                             |
|-----------------------------------------------------------------------|------------------|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                       |                  | Level | Uncertainty | Measurement conditions                                                                                                                                      |
| A-weighted emission sound pressure level at Operator's position (LpA) | dB(A)            | 69    | +/- 1       | Determined in accordance with the test method and calculations defined in EN 12053:2001                                                                     |
| Exterior sound (Stationary)                                           | dB(A)            | 73    | +/- 1       | Determined in accordance with the test method defined in 2015/96 (Annex III)                                                                                |
| Exterior sound (Moving)                                               | dB(A)            | 84    | +/- 1       |                                                                                                                                                             |
| Whole body vibration                                                  | m/s <sup>2</sup> | 0.48  | 50%         | Determined in accordance with the test method defined in ISO 2631-1:1997. (Machine operating duty: Loader work (stone)) and accordance with EN 12096: 1997. |
| Hand-arm vibration                                                    | m/s <sup>2</sup> | <2.5  | N/A         | Determined in accordance with the test method defined in ISO 5349-2: 2001                                                                                   |

[illegible]

### STANDARD MACHINE FEATURES

|              |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Transmission | TorqueLock 4        | <p><b>JCB Powershift transmission</b> incorporating torque converter, bevel box and a 4 speed Powershift gearbox with TorqueLock in 4th gear in one resiliently mounted unit.</p> <p>Operating modes: Manual gear shift incorporated onto the single lever joystick with 4 forward and 4 reverse Powershift gears.</p> <p>Travel speed: 40kph</p> <p>Electrical 2/4 wheel drive disconnect.</p> <p>Switchable transmission disconnect on brake pedal.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|              | Powershift 4        | <p><b>JCB Powershift transmission</b> incorporating torque converter, bevel box and a 4 speed Powershift gearbox in one resiliently mounted unit.</p> <p>Operating modes: Manual gear shift incorporated onto the single lever joystick with 4 forward and 4 reverse Powershift gears.</p> <p>Travel speed: 40kph (33/37kph for 560-80 (tyre dependant)).</p> <p>Electrical 2/4 wheel drive disconnect.</p> <p>Switchable transmission disconnect on brake pedal.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|              | Autoshift 6         | <p><b>JCB Autoshift transmission</b> incorporating torque converter, bevel box and 6-speed powershift gearbox with TorqueLock in 5th and 6th gear in one resiliently mounted unit.</p> <p>Operating modes: Manual and Auto gear shifts incorporated onto the single lever joystick with 6 forward and 4 reverse Powershift gears.</p> <p>Travel speed 40kph.</p> <p>Electrical 2/4 wheel drive disconnect.</p> <p>Auto selection between 4th and 6th gear in Auto mode.</p> <p>Switchable transmission disconnect on brake pedal.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|              | DualTech VT         | <p><b>JCB DualTech Variable Transmission</b> incorporating bevel box, combining hydrostatic and 3 speed direct drive mechanical Powershift gearbox with Flexi mode in one resiliently mounted unit.</p> <p>Operating modes: Flexi mode, Manual and Auto Drive (D), gear shift incorporated onto the single lever joystick with 1 forward and 1 reverse hydrostatic and 3 forward Powershift gears.</p> <p>Travel speed 40kph.</p> <p>Auto 2/4 wheel drive disconnect.</p> <p>Auto selection when in Drive (D) mode.</p> <p>Permanent inching function on the brakes pedal.</p> <p><b>JCB High Speed DualTech Variable Transmission</b> incorporating bevel box, combining hydrostatic and 3 speed direct drive mechanical Powershift gearbox with Flexi mode in one resiliently mounted unit.</p> <p>Operating modes: Flexi mode, Manual and Auto Drive (D), gear shift incorporated onto the single lever joystick with 1 forward and 1 reverse hydrostatic and 3 forward Powershift gears.</p> <p>Travel speed 50kph.</p> <p>Auto 2/4 wheel drive disconnect</p> <p>Auto selection when in Drive (D) mode.</p> <p>Permanent inching function on the brakes pedal.</p> |
| Axles        | AGRI, AGRI SUPER    | <b>Front and rear drive:</b> JCB epicyclic hub reduction drive/steer axles with Max-torque proportioning differentials. (LSD option).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|              | AGRI XTRA, AGRI PRO | <b>Front and rear drive:</b> JCB epicyclic hub reduction drive/steer axles with Front: Limited Slip Differential (LSD) (Maxtrac option) and Rear: Max-Trac torque proportioning differential.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|                    |                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Brakes             | AGRI                        | <p><b>Service brakes:</b> Servo assisted, self-adjusting, oil-immersed in-board high back-off multi-disc type on front axle.</p> <p><b>Parking brake:</b> Cable mechanical hand brake.</p> <p><b>Trailer brakes:</b> Twin line hydraulic trailer brakes and Electronically controlled Braking System (EBS) - (Territory dependent).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                    | AGRI SUPER, AGRI XTRA       | <p><b>Service brakes:</b> Hydraulically powered, self-adjusting, oil-immersed in-board high back-off multi-disc type on front axle.</p> <p><b>Parking brake:</b> SAHR (Spring Applied Hydraulic Release) park brake.</p> <p><b>Trailer brakes:</b> Twin line hydraulic trailer brakes and Electronically controlled Braking System (EBS). Twin line pneumatic trailer brakes and Antilock Braking System (ABS).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                    | AGRI PRO                    | <p><b>Service brakes:</b> Dual circuit braking to front and rear axle. Hydraulically powered, self-adjusting, oil-immersed in-board high back-off multi-disc type.</p> <p><b>Parking brake:</b> SAHR (Spring Applied Hydraulic Release) park brake.</p> <p><b>Trailer brakes:</b> Twin line hydraulic trailer brakes and Electronically controlled Braking System (EBS). Twin line pneumatic trailer brakes and Anti-lock Braking System (ABS).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Steering           | All models                  | 3x steering modes: two wheel steer, four wheel steer, crab steer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                    | AGRI, AGRI SUPER, AGRI XTRA | Hydrostatic power steering with power track rods on both axles.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                    | AGRI PRO                    | Hydrostatic power steering with steer rams on both axles.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Hydraulic controls | All models                  | Single lever servo joystick with proportional service control and adjustable constant flow facility. Incorporating forward/neutral/reverse drive direction selection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Cab                | All models                  | <p>Quiet, safe and comfortable cab conforms to ROPS ISO 3471 and FOPS ISO 3449.</p> <p>Tinted glass all round with laminated single piece curved front and roof screen.</p> <p>Roof bars, front, rear and roof screen wash/wipe and heater/screen demister.</p> <p>Rubber spring, polymer damper - lateral isolation cab mounts.</p> <p>Opening rear window. Split stable door with glass lower and upper.</p> <p>Single integrated front and roof screen blind.</p> <p>Audio-visual warning system for: coolant temperature, water in fuel, engine oil pressure, air cleaner, battery charge, transmission oil temperature and pressure.</p> <p>Hourmeter and road speed indicator.</p> <p>Engine temperature, diesel gauge, AdBlue/DEF gauge.</p> <p>Adjustable steer column with stalk bar forward reverse drive selection shuttle.</p> <p>Automatic eye level audio-visual Longitudinal Load Moment Indicator (LLMI) warning system receiving a signal from a load sensor on the rear axle. This system continuously monitors the machine's forward stability and leaves the operator in control at all times.</p> |

### HOMOLOGATION

|                             |                                                                |
|-----------------------------|----------------------------------------------------------------|
| AGRI, AGRI SUPER, AGRI XTRA | Compiles as a European type approved vehicle as a T1a tractor. |
| AGRI PRO (Excl. 560-80)     | Compiles as a European type approved vehicle as a T1b tractor. |
| 560-80 AGRI PRO             | Compiles as a European type approved vehicle as a T1a tractor. |



**ONE COMPANY, OVER 300 MACHINES.**

Your nearest JCB dealer

### **LOADALL | AGRICULTURAL RANGE**

532-60/538-60/532-70/538-70/542-70/536-95/542-100/560-80

Power rating: 109hp – 173hp   Lift capacity: 3,200kg – 6,000kg   Lift height: 6.2m – 9.8m

JCB Agriculture, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: [salesinfo@jcb.com](mailto:salesinfo@jcb.com)

Download the very latest information on this product range at: [www.jcb.com](http://www.jcb.com)

©2023 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J.C. Bamford Excavators Ltd.

